


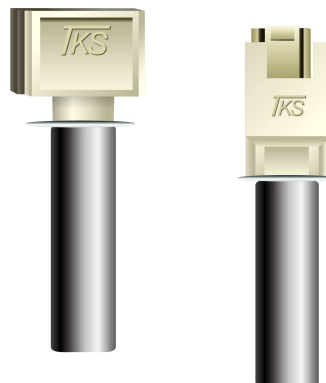

	Features		RAST 2.5, hook protection, fast response type	
	Zero Power Resistance	R60:2.486KΩ	B25/85	3960K
	Thermal Time Constant	6 sec. (in liquid)	Power Rating @ 25℃	100mW
	Operation Temp. Range	-10~+130℃	Voltage Proof Test	3750Vac,1 min

THINKING ELECTRONIC INDUSTRIAL CO., LTD. **2** www.thinking.com.tw 2013.08
 All specifications are subject to change without notice.